

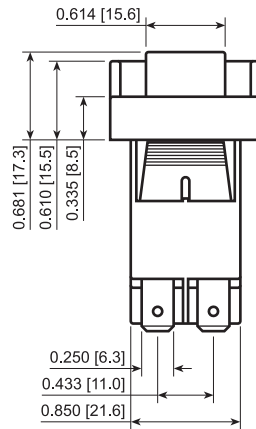
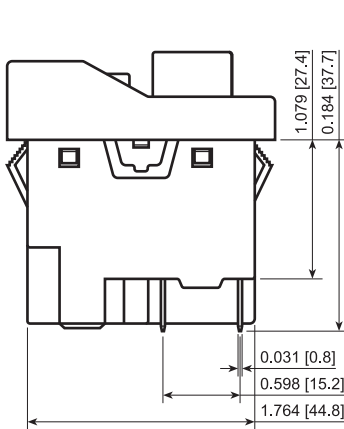



# KJD17 / KJD17F





## Panel Cutout



## Function Options



## Water Protection Options



## FEATURES:

- Heavy Duty Industrial Design
- Electromagnet Provides Automatic Safety Protection Against Power Outages and Restarts
- PVC Cap for Dust and Water Protection


## SPECIFICATIONS:

**RATING:** 16A 120VAC [cURus UL508]  
 16A 220/240VAC [cURus UL508]  
 1/2 HP 120VAC [cURus UL508]  
 2HP 220/240VAC [cURus UL508]

**TEMPERATURE:** -25°C to 55°C  
**ELECTRICAL LIFE:** 10,000 Cycles  
**CONTACT RESISTANCE:** 50mΩ Max.  
**INSULATION RESISTANCE:** 100MΩ Min. at 500VDC  
**DIELECTRIC STRENGTH:** 1,500VAC for 1 Minute  
**INGRESS PROTECTION:** IP54 with PVC Cap

## MATERIALS:

**BODY:** Polyamide 6/6  
**ACTUATOR:** Polyamide 6/6  
**CONTACTS:** Silver Alloy  
**TERMINALS:** Silver Plated Brass

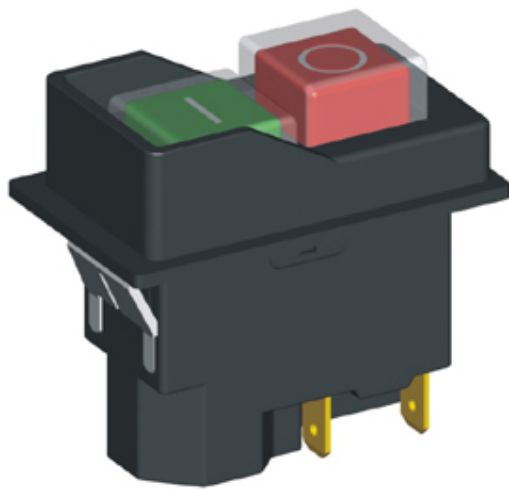

**KJD17**  
Off-On



**KJD17F**  
Off-On w/ Remote Trip

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE